



DEMONSTRATION FOR USING THE **STOP & GO** POCKET TIRE PLUGGER



1 Locate puncture and remove damaging item

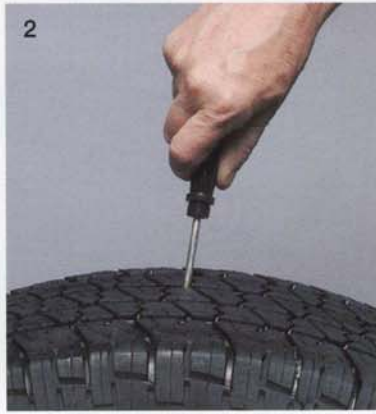

2 Use probe tool to inspect damage

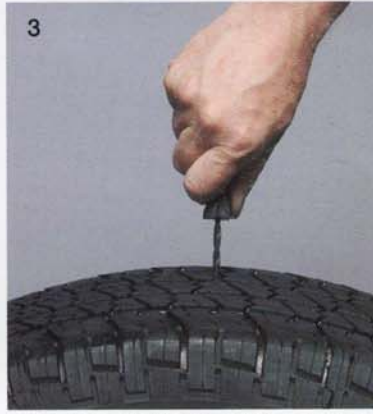


3 Thoroughly ream out hole with rasp tool



4 Set mushroom plug into Plugger with stem down



5 Use nozzle to recess mushroom head down into Plugger

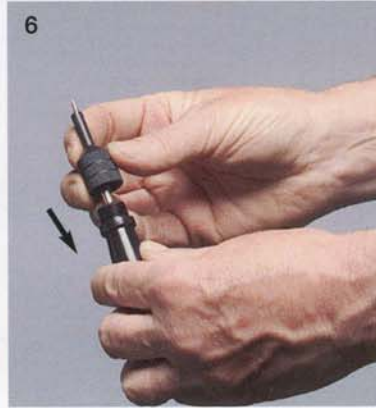


6 Slide nozzle over probe tool and screw down



7 Insert probe and nozzle into the hole then unscrew probe from nozzle




8 Screw loaded Plugger onto nozzle in tire

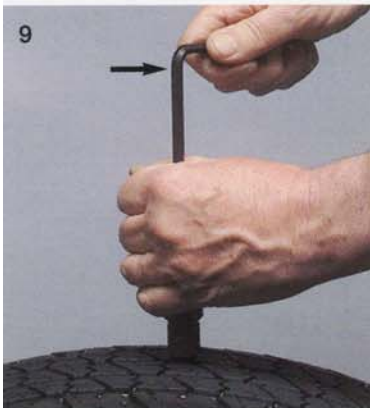


9 Insert hex wrench into bottom of Plugger and turn clockwise until it stops



10 Then turn counter-clockwise until inner rod returns to bottom of Plugger

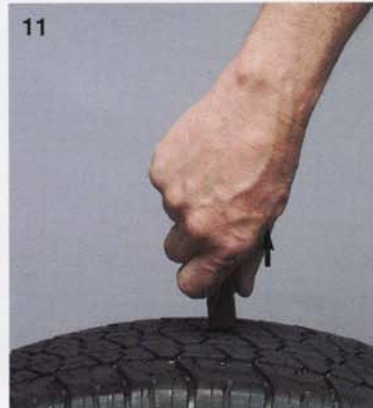


11 Pull Plugger and nozzle away from tire

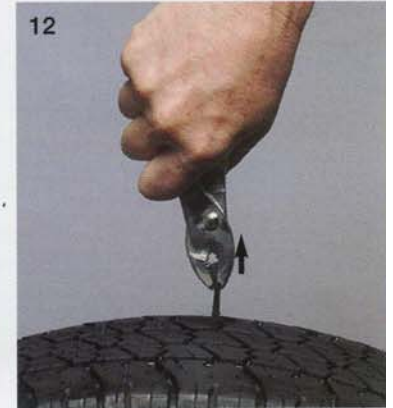

12 Use pliers to stretch the stem back toward you 2 inches



13 Inflate tire to full pressure and then trim stem at tread level

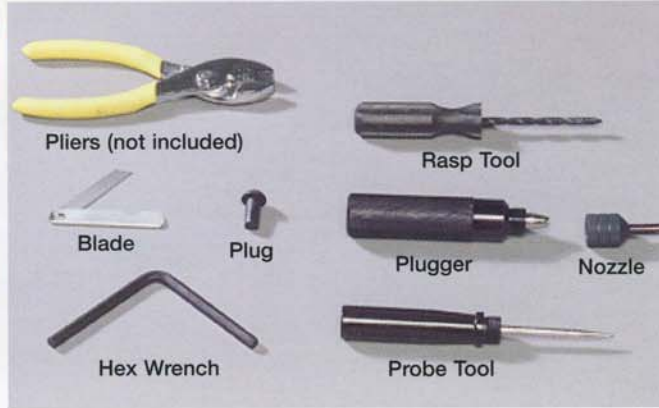

Pliers (not included)

Rasp Tool

Blade

Plug

Plugger

Nozzle

Hex Wrench

Probe Tool



International Inc.

3610 Thunderbird Lane

Crystal Lake, IL. 60012-2089 USA

Call Toll-Free 800 747-0238

Phone: 815-455-9080

Fax: 815-455-9210

info@stopngo.com

www.stopngo.com